

## FEATURES AND SPECIFICATIONS

### Features and Benefits

- Pre-assembled with metal strap for secure PCB retention

### Reference Information

UL File No.: E29179  
 CSA File No.: LR19980  
 Mates With: [70156](#)  
 Designed In: Millimeters

### Electrical

Voltage: 250V  
 Current: 5.0A  
 Contact Resistance: 10mΩ max.  
 Dielectric Withstanding Voltage: 1500V AC  
 Insulation Resistance: 1000 MΩ min.

### Mechanical

Contact Retention to Housing: 4 lb min.  
 Mating Force: 4 lb max.  
 Unmating Force: 1.5 lb min.

### Physical


Housing: 6/6 nylon, UL 94V-2  
 Contact: Phosphor Bronze  
 Plating: Tin  
 Band: Brass, pre-Tinned  
 Operating Temperature: -40 to +80°C



# 5.08mm (.200") Pitch Disk Drive Power Connection System Header

## 53113


### Right Angle with Strap Reverse Polarization



Power Connectors

F

## CATALOG DRAWING (FOR REFERENCE ONLY)

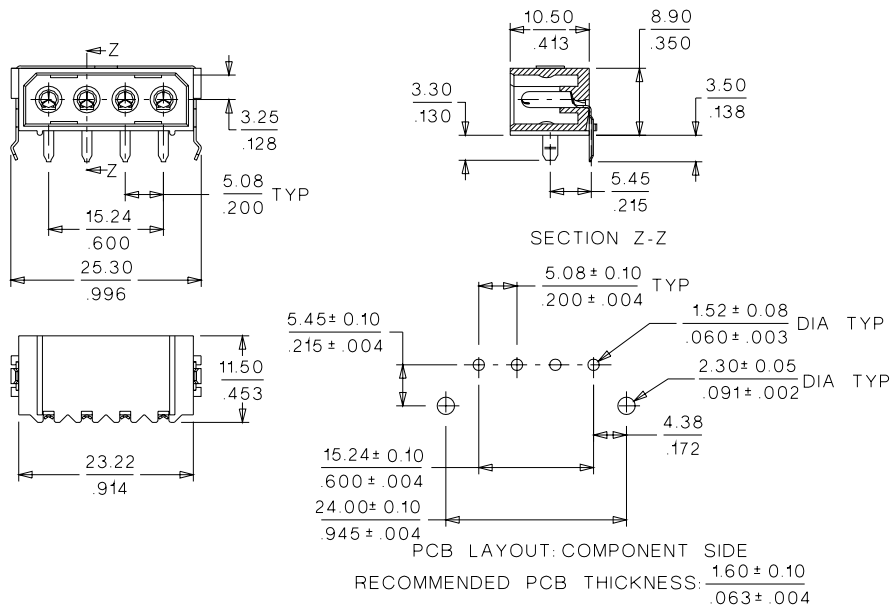

## ORDERING INFORMATION

Engineering No.	Order No.	PC Tail Length
53113-0410 Reverse Polarization	53113-0410	3.50 (.138)