

PHE844

- EMI suppressor, class X1, metallized polypropylene
- 0.1 – 2.2 μF , 440 VAC/480VAC, +105°C

TYPICAL APPLICATIONS


For worldwide use as electromagnetic interference suppressor in all X1 and across-the-line applications.

CONSTRUCTION

Metallized polypropylene winding, encapsulated in self-extinguishing material meeting the requirements of UL 94 V-0.

TECHNICAL DATA

Rated voltage	440 VAC 50/60 Hz (ENEC) 480 VAC 50/60 Hz (UL, CSA)		
Capacitance range	0.1 – 2.2 μF		
Capacitance tolerance	$\pm 20\%$ standard, $\pm 10\%$ option		
Temperature range	-40 to +105°C		
Climatic category	40/105/56/B		
Approvals	ENEC, UL, CSA		
Dissipation factor	Maximum values at +23°C		
	$C \leq 0.1 \mu\text{F}$	$0.1 \mu\text{F} < C \leq 1 \mu\text{F}$	$C > 1 \mu\text{F}$
1 kHz	0.1%	0.1%	0.1%
10 kHz	0.2%	0.4%	0.8%
100 kHz	0.6%	-	-
Test voltage between terminals	The 100% screening factory test is carried out at 3000 VDC. The voltage level is selected to meet the requirements in applicable equipment standards. All electrical characteristics are checked after the test.		
Resonance frequency	Tabulated self-resonance frequencies f_0 refer to 5 mm lead length.		
Insulation resistance	$C \leq 0.33 \mu\text{F}$: $\geq 30\,000 \text{ M}\Omega$ $C > 0.33 \mu\text{F}$: $\geq 10\,000 \text{ s}$		
In DC application	Recommended voltage: $\leq 1000\text{VDC}$		

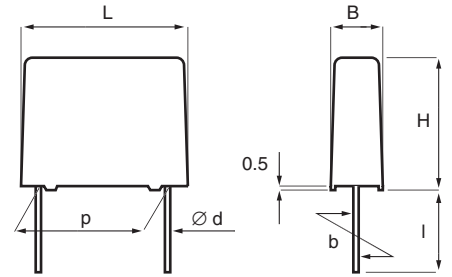

p	d	std l	max l	b
22.5 \pm 0.4	0.8	6	30	\pm 0.4
27.5 \pm 0.4	0.8	6	30	\pm 0.4
37.5 \pm 0.5	1.0	6	30	\pm 0.7

Tolerance in lead length
< 30 mm $\begin{matrix} +0 \\ -1 \end{matrix}$ mm

30 mm $\begin{matrix} +5 \\ -0 \end{matrix}$ mm

ENVIRONMENTAL TEST DATA

Endurance	IEC 60384-14	1.25 x U_R VAC 50 Hz, once every hour increased to 1000 VAC for 0.1 s, 1000 h at upper rated temperature	
Vibration	IEC 60068-2-6 Test Fc	3 directions at 2 hours each, 10-55 Hz at 0.75 mm or 98 m/s ²	No visible damage No open or short circuit
Bump	IEC 60068-2-29 Test Eb	1000 bumps at 390 m/s ²	No visible damage No open or short circuit
Change of temperature	IEC 60068-2-14 Test Na	Upper and lower rated temperature 5 cycles	No visible damage
Active flammability	EN 132400		
Passive flammability	IEC 60384-14 (1993) EN 132400 UL1414	Enclosure material of UL94V-0 flammability class	
Humidity	IEC 60068-2-3 Test Ca	+40°C and 90 – 95% R.H.	56 days

ARTICLE TABLE

Capacitance μF	Box code	Max dimensions in mm			f_o	Max dU/dt	Article code
	B	H	L		MHz	V/ μs	

LEAD SPACING 22.5 MM

0.10	D14	8.0	16.0	26.0	3.2	100	PHE844RD6100MR06L2
0.15	D15	9.0	18.5	26.0	2.6	100	PHE844RD6150MR06L2
0.22	D16	11.0	21.5	26.0	2.1	100	PHE844RD6220MR06L2
0.33	D20	13.5	23.0	26.0	1.8	100	PHE844RD6330MR06L2
0.47	D19	15.5	24.5	26.0	1.5	100	PHE844RD6470MR06L2

LEAD SPACING 27.5 MM

0.22	F11	10.5	20.5	31.5	2.2	100	PHE844RF6220MR06L2
0.33	F03	13.5	23.0	31.5	1.7	100	PHE844RF6330MR06L2
0.47	F13	14.5	24.5	31.5	1.4	100	PHE844RF6470MR06L2
0.68	F14	17.5	28.0	31.5	1.1	100	PHE844RF6680MR06L2
1.0	F16	21.0	30.0	31.5	1.0	100	PHE844RF7100MR06L2

LEAD SPACING 37.5 MM

0.47	R05	13.0	24.0	41.0	1.3	100	PHE844RR6470MR06L2
0.68	R05	13.0	24.0	41.0	1.1	100	PHE844RR6680MR06L2
1.0	R04	15.0	26.0	41.0	0.92	100	PHE844RR7100MR06L2
1.5	R03	19.0	36.0	41.0	0.74	100	PHE844RR7150MR06L2
2.2	R06	21.0	38.0	41.0	0.60	100	PHE844RR7220MR06L2

APPROVALS/REFERENCE DOCUMENTS

Certification Body reference	Specification	Approval
ENEC	EN 132400	SE/0140-1
UL	UL 1283 ($U_R=480$ VAC)	E100117
	UL 1414 ($U_R=250$ VAC)	E73869
cUL recognition (CSA)	C 22.2 No. 8 ($U_R=480$ VAC)	E100117
	C 22.2 No. 1 ($U_R=250$ VAC)	E73869

ORDERING INFORMATION

The article code for the standard part is given in the article table. For other options, see page 12.

MARKING

- RIFA
- RIFA article code
- Rated capacitance
- Capacitance tolerance code
- Rated voltage
- X1
- Approval marks
- Manufacturing date code
- IEC climatic category
- Passive flammability class